



AIR INLET


FACE LEG MAY VARY FROM .375" - .750" +/- .032
DEPENDING ON THICKNESS OF FRAME

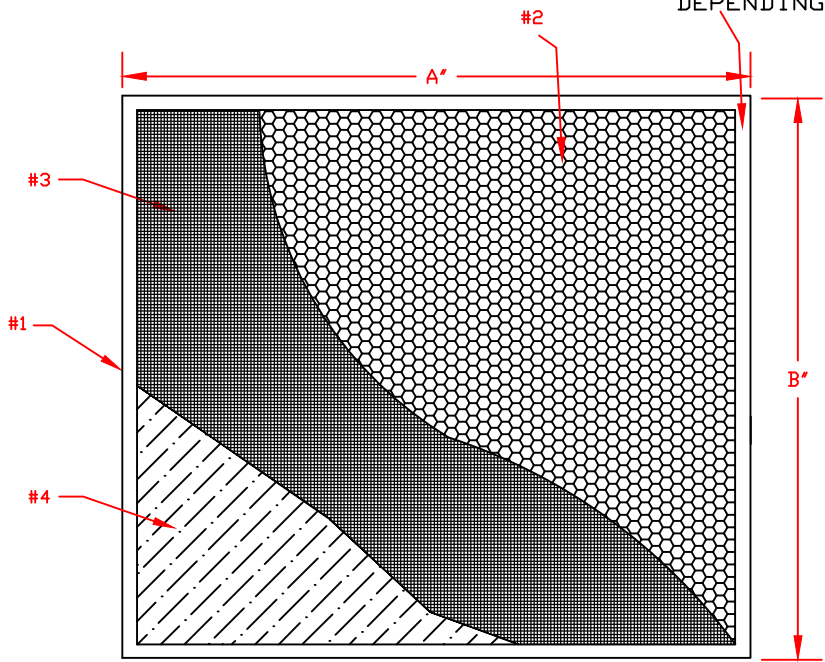

S I D E

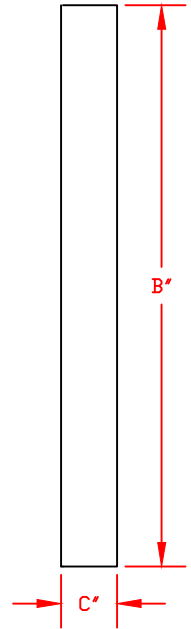

AIR OUTLET

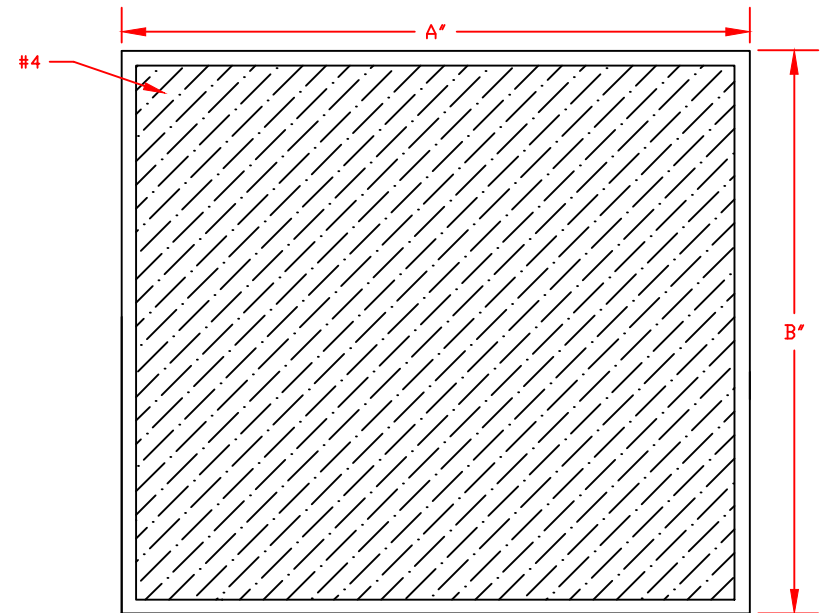

SPECIFICATIONS

TOLERANCE: A, B +0/-1/8 C +0/-1/32
DIMENSIONS: A X B X C

DIMENSIONS

A	12
B	12
C	5 7/8

- #1 FRAME MATERIAL:
ELECTRO TIN PLATE (26 GAUGE)
- #2 CORRUGATED:
HONEYCOMB SEPERATOR
FILLED WITH SELECTED MEDIA
 - COCONUT SHELL CARBON
 - 50/50 BLEND CARBON / POTASSIUM
 - POTASSIUM PERMANGANATE
 - SPECIAL MEDIA: HYDROSIL TO SUPPLY
- #3 SCREEN MATERIAL:
FIBERGLASS WIRECLOTH
- #4 POLY PAD WHITE IN COLOR TWO SIDES

FILLING INFO

FILL %	25 %	50 %	75 %	100 %
				<input checked="" type="checkbox"/>

NOTES:

MATERIAL:
MAY VARY IN COLOR FROM PART TO PART

POP RIVET HOLE FOR 1/8 RIVET
MAY VARY IN QUANTITY
DO TO FRAME THICKNESS

FILTER DESIGN:
AIRFLOW SOFT FACE VELOCITY
MID TO LOW HUMIDITY LEVELS

TITLE: **DISPOSABLE PANEL**

CUSTOMER PO#

PART NO. 99-2-05-13d-02-12126

DRAWN: MLF SCALE: NTS DATE: 9/12/18

APPROVED SIGNATURE :

DATE: